


Installation Instruction

URIMAT ceramic bowl (Dimensions in mm)

URIMAT®

URIMAT *ceramiccompact*

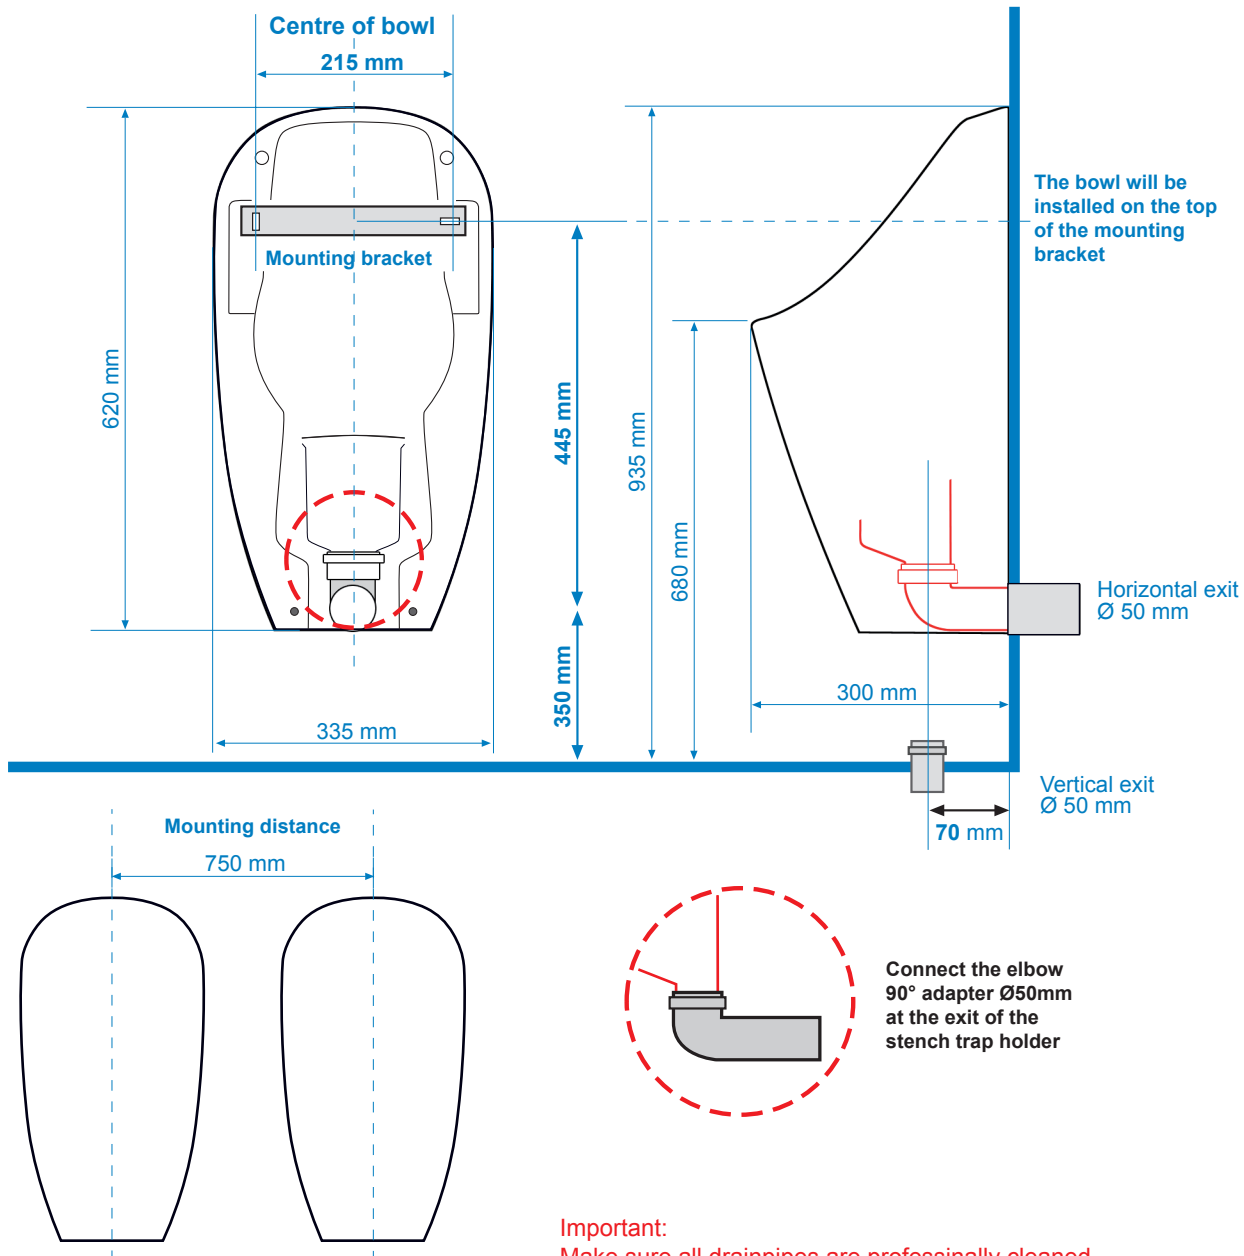

www.urimat.ie

IMPORTANT: EU-Standard min. downgrade for wastewater pipes = 2%, i.e. 2cm per metre drainpipe, ideally 3%, but 5% maximum!

URIMAT *ceramiccompact* with mounting bracket and -kit, stretch trap insert, sieve and 90° elbow Conn Ø50mm, Art.-No. 12.301



Couplers for Imperial waste pipe 1 1/4", 1 1/2" & 2" available on request! To shorten the coupler, the outer rims on either side can be cut-off. The pipe of the supplied 90° elbow connector can also be cut to suit site conditions.

Connect waste pipe coupler with 1 1/2" side to waste-outlet directly without 90° adapter if pipe is below urinal.

Note: please ensure waste-pipe connection is properly sealed!



Swiss Quality

© URIMAT 07.2011